


智能视讯方案提供商

① 嘉兴猛凌信息科技有限公司 / ☎ 13600182866 / ② 深圳市宝安区松岗街道芙蓉路9号

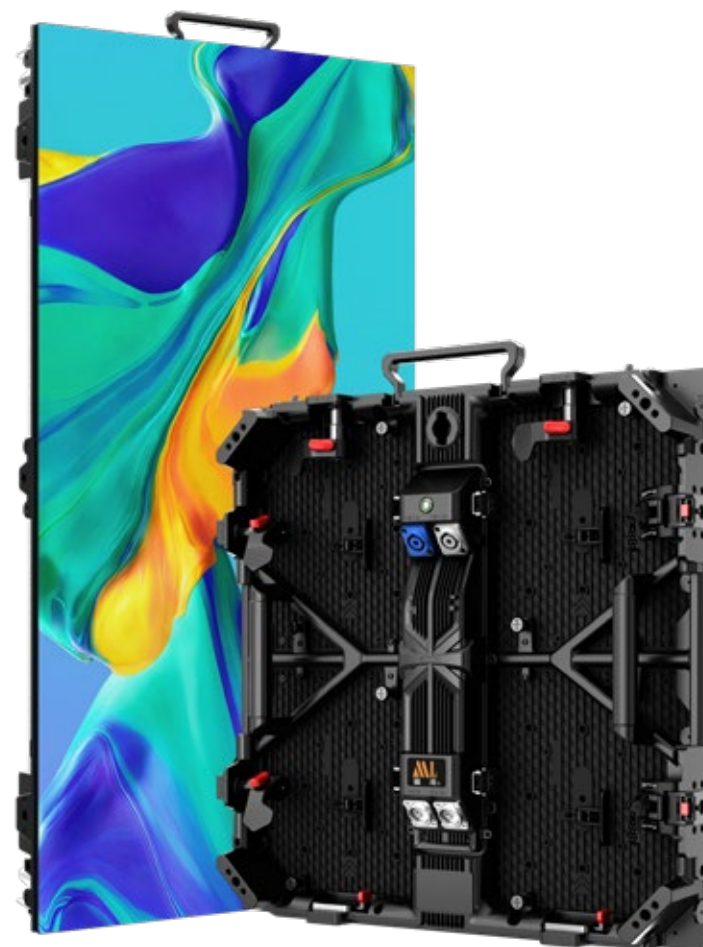

M系列
LED全彩租赁显示屏

关于猛凌

嘉兴猛凌信息科技有限公司成立于2020年, 公司位于嘉兴市海盐县, 是一家专业的ICT技术服务企业。公司立足高端技术服务, 致力于整个ICT资源的整合, 主营业务为: 新建/改造类弱电网络的智能化、智慧化建设工程及集成软硬件、特种设备安装改造修理、特种设备检验检测、互联网数据服务、物联网应用服务、软件开发、信息技术咨询服务及各类平台的技术服务。于2022年在深圳成立分公司LED事业部, 是一家专注于LED显示屏研发、生产、销售和服务的技术公司。

猛凌产品广泛应用于户内外商业传媒、体育场馆、舞台演绎、异形创意等应用领域, 为之提供一站式LED显示屏综合解决方案。随着技术的不断创新和制造工艺的日臻完善, 猛凌在国际市场树立了众多经过时间证明的经典案例, 成为国际LED应用产品“中国制造”和“中国创造”的代表之一。

如今, 猛凌拥有5000多个成功案例, 遍布全球数十个国家, 获得国际知名品牌的信赖, 在国际知名赛事和国际活动中崭露头角, 捕捉数千万观众的焦点。猛凌始终坚持“高性能产品、高标准技术、高质量服务”的经营理念, 坚持以客户为中心, 基于客户需求持续创新, 赢得了客户的尊重和信赖, 严格执行ISO9001:2008质量管理体系, 为产品质量保驾护航, 做到精益求精。目前公司自主研发生产的各类户内外全彩LED显示屏, 均通过了CE、FCC、ROHS、UL等国内/国际专业认证。

猛凌专注于LED显示行业上下游产业链整合、研发力量的加强、大规模的标准化量产、软硬件的创新、服务体系的不断完善, 猛凌定位于成为全球LED应用产品研发、制造、销售和服务为一体的旗舰航母。





M系列




500*1000常规屏



500*500常规屏



500*500柔性屏



双尺寸设计



轻量化设计



高亮度显示



内外弧造型



拆装极便捷




模块化设计

轻量化设计

箱体采用轻量化设计,使用时更灵活,产品操作体验更佳

- 500*500箱体
6kg±0.5(室内)
6.5kg±0.5(户外)
- 500*1000箱体
11kg±0.5(室内)
12kg±0.5(户外)
- 箱体厚度
78mm(室内)
78mm(户外)

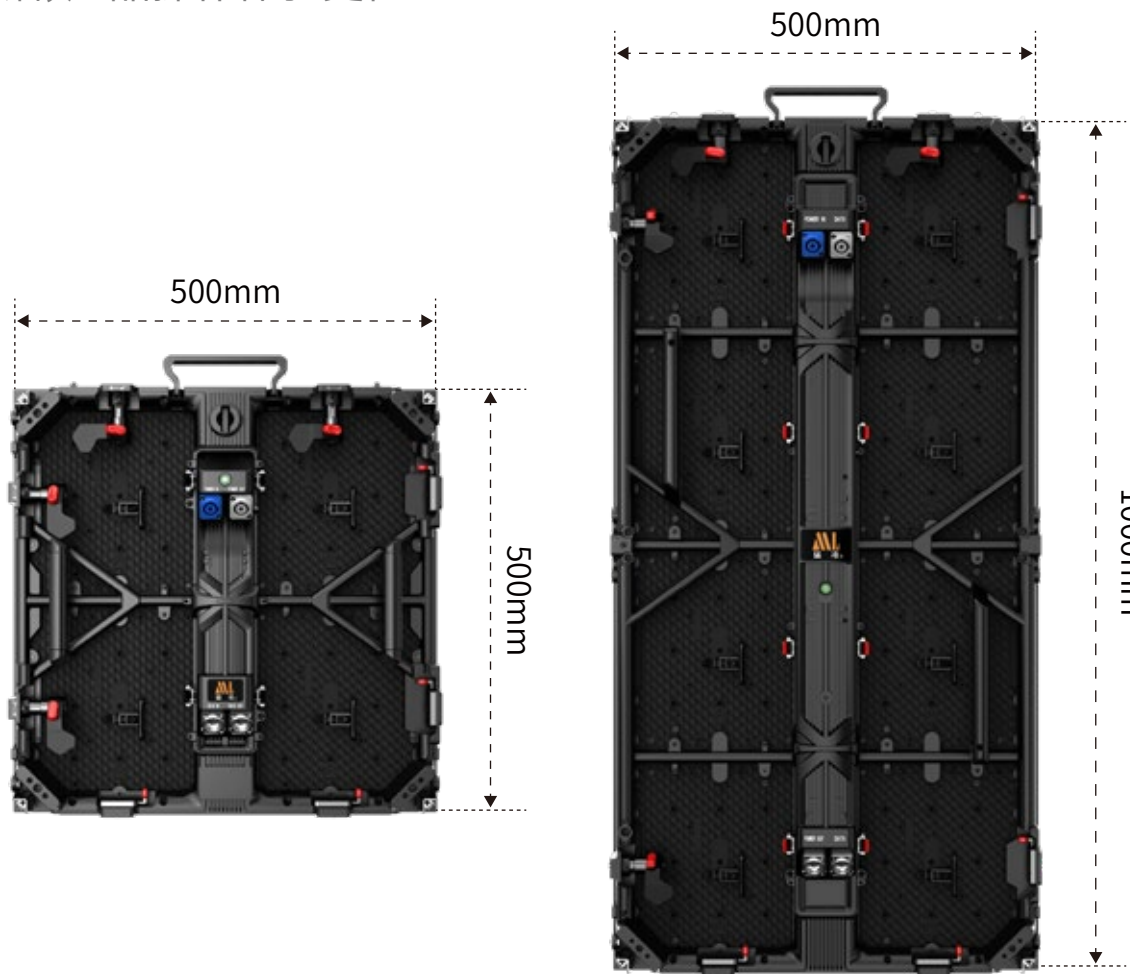

高亮高刷 至臻显示

细节真实丰富 色彩逼真 享受更佳的视觉体验
4000nit高亮度 5000:1对比度



3840HZ 高刷新率



低刷新率

平台化设计

采用平台化设计,不同点间距的模组可用于同一箱体上
方便客户灵活调整屏幕点间距,进一步节约成本支出





实用接口设计

全系列标配品牌电源航插头接口、品质网线接口,实现电力及信号稳定传输
配备优质电缆,线材寿命更长,使用故障率更低




弧形功能

支持弧形箱体定制, 弧形拼接多角度
包括 (-10° , -7.5° , -5° , -2.5° , 0° , 2.5° , 5° , 7.5° , 10°)

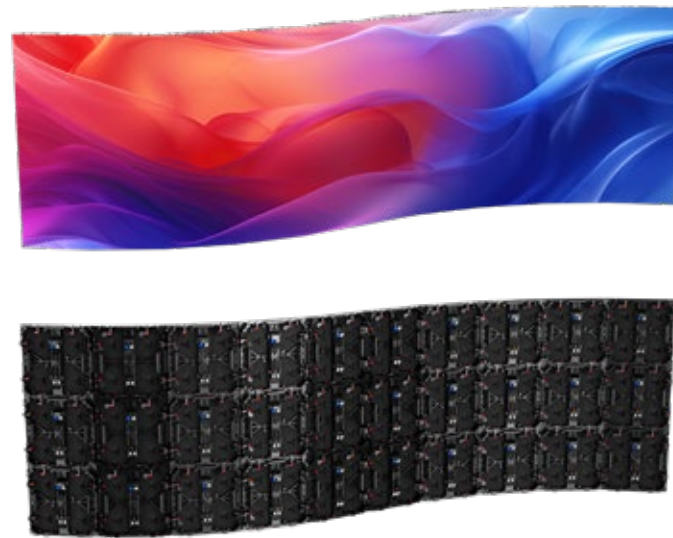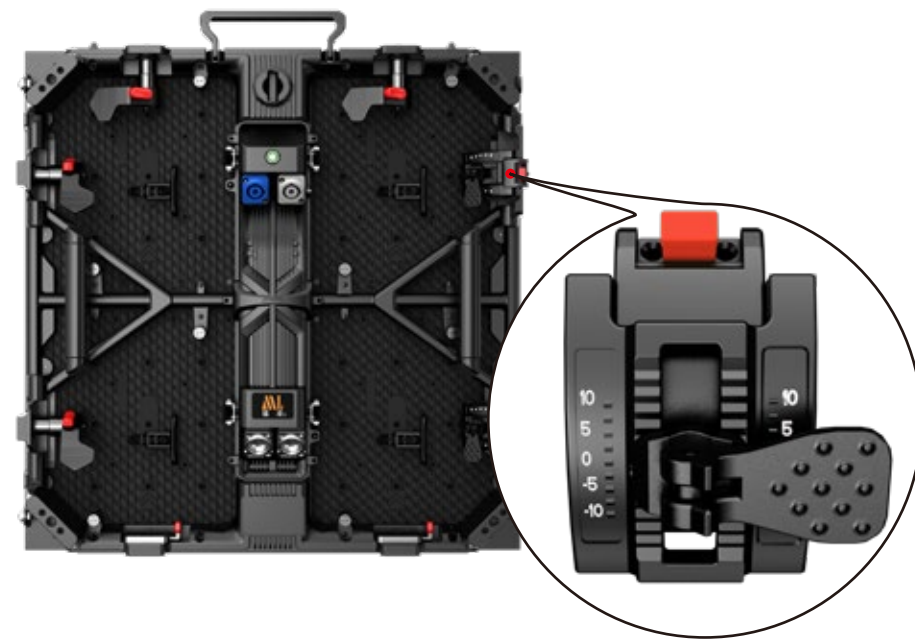


可互拼更灵活

直屏版、弧形板均支持长短箱体上下互拼显示
方便客户根据舞台空间做灵活调整

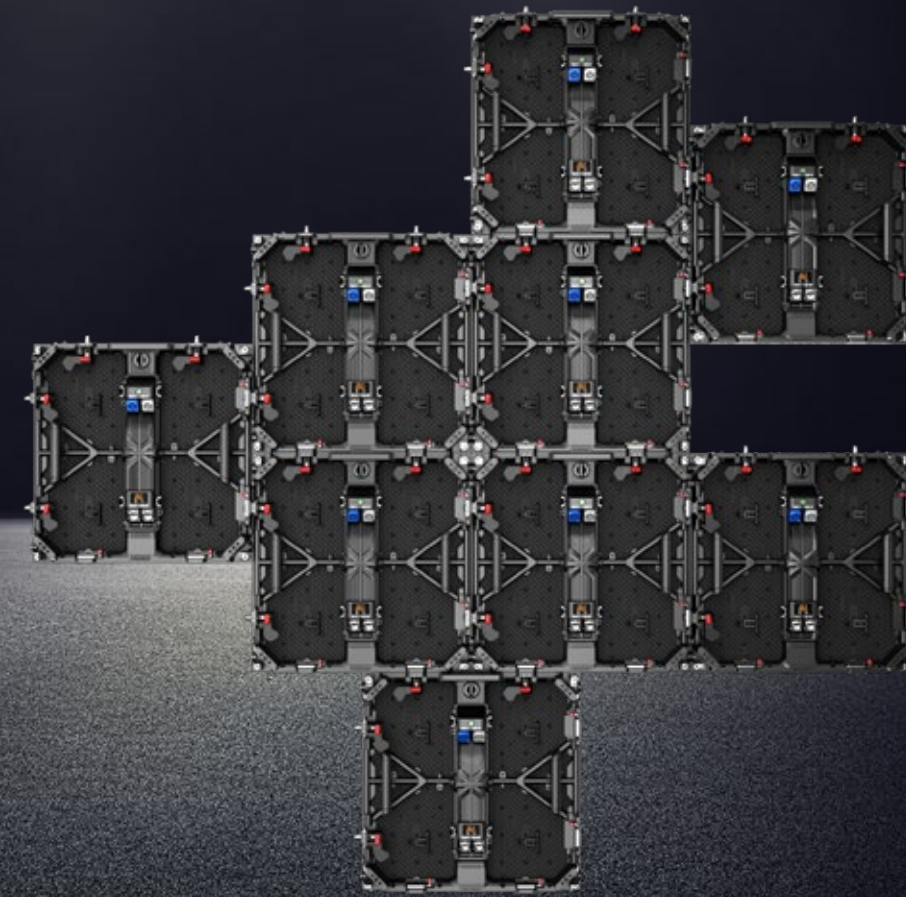

拼接造型

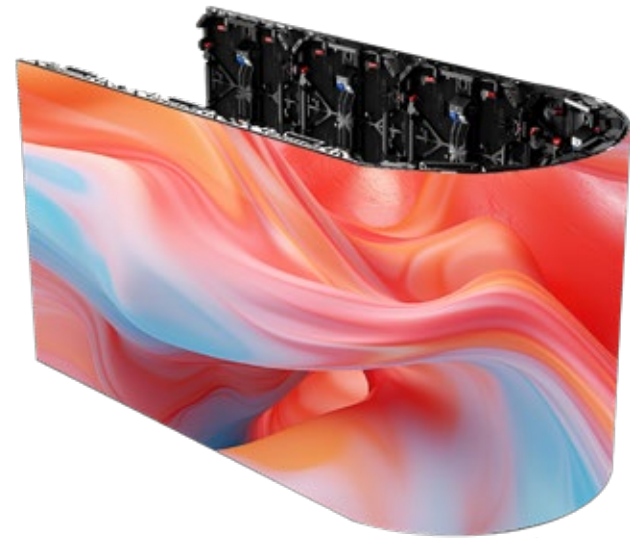

U形拼装



柔性屏拼装



环形拼装


安装模式



吊装



日字架

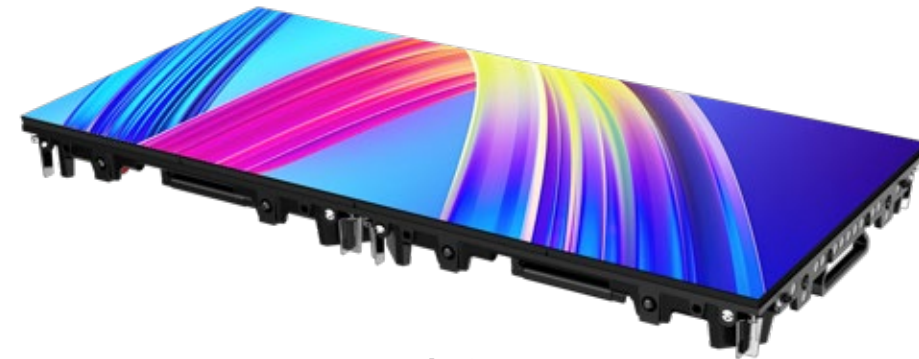

地砖屏



座装

集成模块化设计

集成式电源盒设计, 内含电源、接收卡等, 解开搭扣即可取下
模组采用“磁吸+螺丝锁定”双保障安全设计



应用领域

- 01

各类活动
- 02

商务会议
- 03

机场超市
- 04

户外广告

M系列产品参数-室内

产品型号	M191(500*500直边箱GOB)	M261(500*500直边箱)	M291(500*500直边箱)	M391(500*500直边箱)	M391(500*1000直边箱)
像素间距	1.953	2.604mm	2.976mm	3.91mm	3.91mm
像素配置	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
封装方式	SMD1415	SMD1515	SMD2020	SMD2020	SMD2020
亮度	1000 nit	1000 nit	1000 nit	1000 nit	1000 nit
白平衡亮度	800 nit	800 nit	800 nit	800 nit	800 nit
色温	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)
可视角度(水平/垂直)	H160°/V140°	H160°/V140°	H160°/V140°	H160°/V140°	H160°/V140°
像素密度	262142dots/m²	147456dots/m²	112896dots/m²	65536 dots/m²	65536 dots/m²
模组尺寸	W500mmxH250mm	W250mmxH250mm	W250mmxH250mm	W250mmxH250mm	W250mmxH250mm
模组分辨率	256x256 dots	96x96 dots	84x84 dots	64x64 dots	64x64 dots
箱体尺寸	W500*H500*D78mm	W500*H500*D78mm	W500*H500*D78mm	W500*H500*D78mm	W500*H1000*D78mm
箱体分辨率	256x256	192x192 dots	168x168 dots	128x128 dots	128x256 dots
箱体重量	6kg±0.5	6kg±0.5	6kg±0.5	6kg±0.5	11kg±0.5
箱体材质	AZ91D	AZ91D	AZ91D	AZ91D	AZ91D
箱体宽高比	1:1	1:1	1:1	1:1	1:02
防水等级	Front IP30/Rear IP30	Front IP30/Rear IP30	Front IP30/Rear IP30	Front IP30/Rear IP30	Front IP30/Rear IP30
操作温度/湿度	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH
储藏温度/湿度	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH
灰度等级	16 bits	14 bits	14 bits	14 bits	14 bits
对比度	5000:1	5000:1	5000:1	5000:1	5000:1
刷新率	7680 Hz	7680 Hz	3840 Hz	3840 Hz	3840 Hz
输入电压频率	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
输入电压	AC110~220V (+/-10%)	AC220V (+/-10%)	AC110~220V (+/-10%)	AC110~220V (+/-10%)	AC110~220V (+/-10%)
输入功率(最大)	<580W/m²	<580W/m²	<580W/m²	<580W/m²	<580W/m²
输入功率(平均)	<200W/m²	<180W/m²	<180W/m²	<180W/m²	<180W/m²
装置模式	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging
维护模式	Front/Rear Maintenance	Front/Rear Maintenance	Front/Rear Maintenance	Front/Rear Maintenance	Front/Rear Maintenance
驱动方式	Constant Current, 1/16 Scanning	Constant Current, 1/24 Scanning	Constant Current, 1/21 Scanning	Constant Current, 1/16 Scanning	Constant Current, 1/16 Scanning
信号传输距离	CAT5 Cable (L≤100m), multi-mode fiber (L≤300m), single mode fiber (L≤10km)				
LED封装制造	晶台1415	瑞晟1515	晶台2020	晶台2020	晶台2020
电源供应商	宽压or窄压/巨能200W	窄压/南电200W	宽压/南电200W	宽压/南电200W	宽压/南电200W
驱动芯片	ICN2055(集创)	ICN2153(集创)	ICN2153(集创)	ICN2153(集创)	ICN2153(集创)
接收卡	A8S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)
箱体平整度	≤0.2m	≤0.2m	≤0.2m	≤0.2m	≤0.2m

M系列产品参数-户外

M290(500*500直边箱)	M290(500*1000直边箱)	M390(500*500直边箱)	M390(500*1000直边箱)	M480(500*500直边箱)	M480(500*1000直边箱)
2.976mm	2.97mm	3.91mm	3.91mm	4.81mm	4.81mm
1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
SMD1415	SMD1415	SMD1820	SMD1820	SMD1820	SMD1820
4000 nit	4000 nit	4000 nit	4000 nit	4000 nit	4000 nit
3500 nit	3500 nit	3500 nit	3500 nit	3500 nit	3500 nit
6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)
H140°/V140°	H140°/V140°	H140°/V140°	H140°/V140°	H140°/V140°	H140°/V140°
112896 dots/m²	112896 dots/m²	65536 dots/m²	65536 dots/m²	43264 dots/m²	43264 dots/m²
W250mmxH250mm	W250mmxH250mm	W250mmxH250mm	W250mmxH250mm	W250mmxH250mm	W250mmxH250mm
84x84dots	84x84dots	64x64dots	64x64dots	52x52dots	52x52dots
W500*H500*D78mm	W500*H1000*D78mm	W500*H500*D78mm	W500*H1000*D78mm	W500*H500*D78mm	W500*H1000*D78mm
168x168 dots	168x336 dots	128x128 dots	128x256 dots	104x104dots	104x208dots
6.5kg±0.5	12kg±0.5	6.5kg±0.5	12kg±0.5	6.5kg±0.5	12kg±0.5
AZ91D	AZ91D	AZ91D	AZ91D	AZ91D	AZ91D
1:1	1:02	1:1	1:02	1:1	1:02
Front IP65/Rear IP65	Front IP65/Rear IP65	Front IP65/Rear IP65	Front IP65/Rear IP65	Front IP65/Rear IP65	Front IP65/Rear IP65
-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH	-30°C~+60°C/10%~90%RH	-30°C~+60°C/10%~90%RH	-30°C~+60°C/10%~90%RH
-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH
14 bits	14 bits	14 bits	14 bits	14 bits	14 bits
5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
3840 Hz	3840 Hz	3840 Hz	3840 Hz	3840 Hz	3840 Hz
50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
AC110~220V (+/-10%)	AC110~220V (+/-10%)	AC110~220V (+/-10%)	AC110~220V (+/-10%)	AC110~220V (+/-10%)	AC110~220V (+/-10%)
<580W/m²	<580W/m²	<580W/m²	<580W/m²	<580W/m²	<580W/m²
<180W/m²	<180W/m²	<180W/m²	<180W/m²	<180W/m²	<180W/m²
Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging
Front/Rear Maintenance	Front/Rear Maintenance	Front/Rear Maintenance	Front/Rear Maintenance	Front/Rear Maintenance	Front/Rear Maintenance
Constant Current,1/21 Scanning	Constant Current,1/21 Scanning	Constant Current,1/16 Scanning	Constant Current,1/16 Scanning	Constant Current,1/13 Scanning	Constant Current,1/13 Scanning
CAT5 Cable (L≤100m), multi-mode fiber (L≤300m), single mode fiber (L≤10km)					
晶台1415	晶台1415	晶台1820	晶台1820	晶台1820	晶台1820
宽压/南电200W	宽压/南电200W	宽压/南电200W	宽压/南电400W	宽压/南电400W	宽压/南电400W
ICN2153(集创)	ICN2153(集创)	ICN2153(集创)	ICN2153(集创)	ICN2153(集创)	ICN2153(集创)
A5S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)
≤0.2m	≤0.2m	≤0.2m	≤0.2m	≤0.2m	≤0.2m

MR系列产品参数-柔性屏

产品型号	MR191(500*500柔性屏)	MR261(500*500柔性屏)	MR291(500*500柔性屏)	MR391(500*500柔性屏)
像素间距	1.953	2.604mm	2.976mm	3.91mm
像素配置	1R1G1B	1R1G1B	1R1G1B	1R1G1B
封装方式	SMD1415	SMD1515	SMD2020	SMD2020
亮度	1000 nit	1000 nit	1000 nit	1000 nit
白平衡亮度	800 nit	800 nit	800 nit	800 nit
色温	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)	6500K-9300K (adjustable)
可视角度(水平/垂直)	H160°/V140°	H160°/V140°	H160°/V140°	H160°/V140°
像素密度	262142dots/m²	147456dots/m²	112896dots/m²	65536 dots/m²
模组尺寸	W500mmxH250mm	W500mmxH250mm	W500mmxH250mm	W500mmxH250mm
模组分辨率	256x128 dots	192x96 dots	168x84 dots	128x64 dots
箱体尺寸	W500*H500*D78mm	W500*H500*D78mm	W500*H500*D78mm	W500*H500*D78mm
箱体分辨率	256*256 dots	256*256 dots	256*256 dots	256*256 dots
箱体重量	7kg	7kg	7kg	7kg
箱体材质	AZ91D	AZ91D	AZ91D	AZ91D
箱体宽高比	1:1	1:1	1:1	1:1
防水等级	IP30	IP30	IP30	IP30
操作温度/湿度	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH	-30°C~+50°C/10%~90%RH
储藏温度/湿度	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH	-40°C~+80°C/10%~90%RH
灰度等级	16 bits	14 bits	14 bits	14 bits
对比度	5000:1	5000:1	5000:1	5000:1
刷新率	7680 Hz	7680 Hz	3840 Hz	3840 Hz
输入电压频率	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
输入电压	AC110~220V (+/-10%)	AC220V (+/-10%)	AC110~220V (+/-10%)	AC110~220V (+/-10%)
输入功率(最大)	<580W/m²	<580W/m²	<580W/m²	<580W/m²
输入功率(平均)	<200W/m²	<180W/m²	<180W/m²	<180W/m²
装置模式	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging	Floor Mounted/Hanging
维护模式	Rear Maintenance	Rear Maintenance	Rear Maintenance	Rear Maintenance
驱动方式	Constant Current, 1/16 Scanning	Constant Current, 1/24 Scanning	Constant Current, 1/21 Scanning	Constant Current, 1/16 Scanning
信号传输距离	CAT5 Cable (L≤100m), multi-mode fiber (L≤300m), single mode fiber (L≤10km)			
LED封装制造	晶台1415	瑞晟1515	晶台2020	晶台2020
电源供应商	宽压or窄压/巨能200W	窄压/南电200W	宽压/南电200W	宽压/南电200W
驱动芯片	ICN2055(集创)	ICN2153(集创)	ICN2153(集创)	ICN2153(集创)
接收卡	A8S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)	A5S PLUS (诺瓦)
箱体平整度	≤0.15mm	≤0.15mm	≤0.15mm	≤0.2mm



案例展示

